


Customer _____
 Address _____

Tel _____
 Mobile _____
 Email _____

Order _____
 Quote _____
 Date _____
 Project Name _____
 Project Location _____

1	2	3	4	5	6	7		8	9	11	12	13	14	15
						Overall Frame Dimensions See table blow								
Blind	Window Location	Blind or Recess	Frame Details	Blind Type ²	Incline 	Width (X)	Drop (Y)	Hardware Colour	First Fabric	Blind Format	Second Fabric	Manual Handle Options	Powered options ^{5,6}	Qty
1		Blind Recess ¹	Orientation	AO (0°) Powered only AB (0° - 30°) DB (30° - 60°) PB (60° - 90°)				Beige White Graphite		Single ended Full Travel	N/A	Clear (for control rod) Rod Length (mm) _____ Qty _____ Webbing OA Articulating OA Fixed Handle Plastic ⁴ Metal Nickel Metal Chrome	Motor Wire exit point Left Right Centre Control Switch constant Switch Radio	
			Standard							Single ended Full Travel ³ Both fabrics stack same end	Fabric code			
			Reversed							Double ended Full Travel Fabrics stack at each end				
2		Blind Recess ¹	Orientation	AO (0°) Powered only AB (0° - 30°) DB (30° - 60°) PB (60° - 90°)				Beige White Graphite		Single ended Full Travel	N/A	Clear (for control rod) Rod Length (mm) _____ Qty _____ Webbing OA Articulating OA Fixed Handle Plastic ⁴ Metal Nickel Metal Chrome	Motor Wire exit point Left Right Centre Control Switch constant Switch Radio	
			Standard							Single ended Full Travel ³ Both fabrics stack same end	Fabric code			
			Reversed							Double ended Full Travel Fabrics stack at each end				
			Colour											
			Beige White											
			Beige White											


- When Recessed dimension is given, 4 mm is deducted from the width and drop to allow for clearance in the recess.
- AO Blind type can only be powered when in a frame, all other blind types can be manual or powered.
- This is the Day/Night option, i.e both fabrics stack at the same end.
- Colour matched to the hardware.
- Please fill in a Powered Accessories Order Form.
- For blinds with two fabrics you will need to specify a Day/Night Controller on the Powered Accessories Custom order form. Larger widths can be accommodated depending on fabric and drop, visible support cords can be added and additional fixings on frames 1m wide may be required.

Maximums & minimums With Guide Wires


	Width (X)		Drop (Y)	
	Min	Max	Min	Max
Manual	1400mm	2500mm	200mm	2500mm
Powered	[55 1/8"]	[98 7/16"]	[7 7/8"]	[98 7/16"]

Without Guide Wires


	Width (X)		Max	Drop (Y)	
	Min	Day Night ³		Min	Max
Manual	Single or Double ended	128mm 5 1/16"	2500mm [98 7/16"]	200mm [7 7/8"]	2500mm [98 7/16"]
	Day Night ³	128mm 5 1/16"			
Powered		478mm [18 13/16"]	628mm [24 3/4"]		



Standard frame powered
AO types only (see note 2)
vertical mounting only.

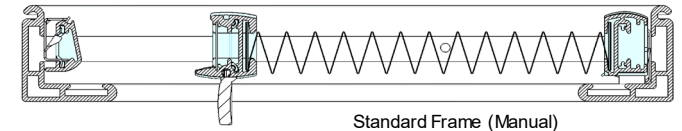

Standard Frame (Manual)

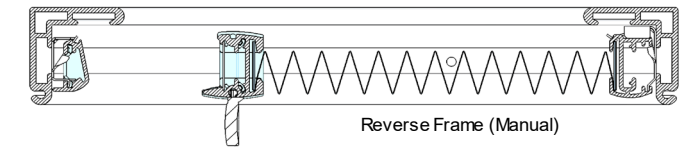

Reverse Frame (Manual)

Notes

