

# SKYSOL2 Shape 07 - Rectangle with corner cut out

## Order Form and Product Guide


Customer \_\_\_\_\_  
 Address \_\_\_\_\_  
 \_\_\_\_\_

Tel \_\_\_\_\_  
 Mobile \_\_\_\_\_  
 Email \_\_\_\_\_

Order \_\_\_\_\_  
 Quote \_\_\_\_\_  
 Date \_\_\_\_\_  
 Project Name \_\_\_\_\_  
 Project Location \_\_\_\_\_

Disclaimer: **Are any of the blinds on this order to be installed where children under 42 months old are likely to be allowed?** **Yes No Signed \_\_\_\_\_ Print \_\_\_\_\_**

1	2	3	4	5	6	7	8	9	10	11	12	13		
Blind No.	Window Location	Fabric	Blind or Recess	Hardware Colour	Blind Type	2 Bar or 3 Bar	3 Bar Cord Quick Tensioners <sup>2</sup>	Stack Position	Fixing position / Reference <sup>3,4</sup>		Manual control options		Powered options	Qty
						Top Of Blind	Bottom Of Blind		Pull Cord Position	Handle Type				
			Blind Recess	Beige White Graphite	AO (0°) AO-DB (0°-20°) † AO-DBE (0°-20°) AB (0°-30°) DB (31°-60°) DBE (31°-45°) PB (61°-120°)  Enter precise incline in box below	<b>AO type blinds are 2 Bar only</b>  2 Bar 3 Bar	Yes No	<b>Top Stack only on this shape</b>	<b>Face fix</b> <b>Manual</b> - HR3 <b>Powered</b> - XL3	FR2C FP3 CD2 ND2	<b>AO Blind Types only</b>  If an "AO" type blind is selected, a pull cord will be factory fitted on the longest vertical edge (Dim 'C' or 'D').  No other control is available <b>Metal Cord Cleat</b> <i>(With black or white rubber insert)</i> <b>Chrome</b> - Black <b>Chrome</b> - White <b>Nickel</b> - Black <b>Nickel</b> - White	<b>AB, DB, DBE &amp; PB Blinds Only</b>  None Webbing <sup>4</sup> Plastic Articulating <sup>4,5</sup> Plastic Fixed <sup>4</sup> Metal Chrome Metal Nickel Clear (Control Rod)  Rod Length _____  Qty _____	<b>Motor Position</b> Top Bottom  <b>Motor Wire exit point</b> Left Right Center  <b>Controlled By</b> Switch constant Switch Momentary Somfy remote <sup>5</sup> Dometic remote <sup>5</sup>  Motor ID _____	

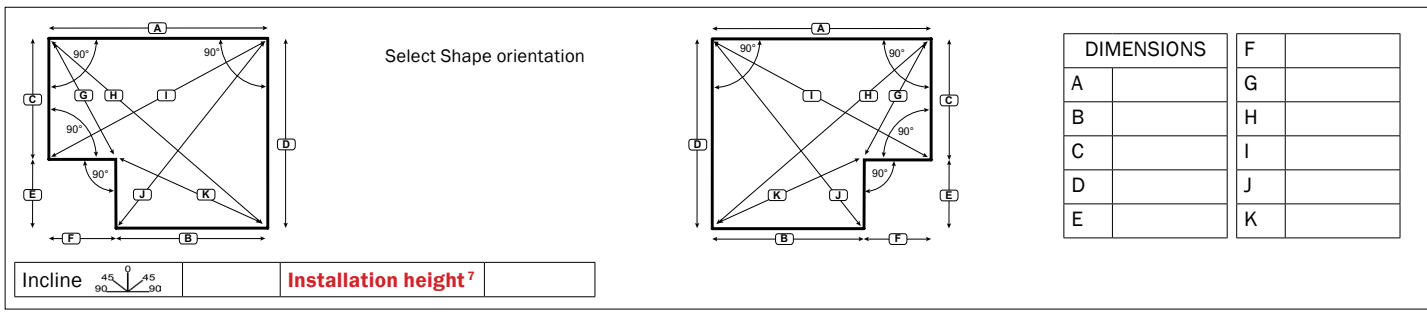

Motor ID	Description	Voltage
25SD1	Atlantic 12S Double End	12 V DC
25SD2	Atlantic 24S Double End	24 V DC
24	Somfy LW25-B83	24 V DC
LV25	Somfy LV25-B64	24 V DC
TM24	Hunter Douglas M35S	24 V DC

1. Guide wires run behind fabric.
2. Quick Tensioners are fitted to the guide wires on all 3 bar blinds. Quick Tensioners are optional on cords (for easier tensioning).
3. See Manual Fixing Configurations on [page 2](#) and Powered Fixing Configurations on [page 3](#).
4. Colour matched to hardware colour.
5. Webbing handles cannot be fitted to connect rails if one is required.
6. Please fill in a Powered Accessories Custom Order Form.
7. Installation height required for cord operated blinds. EN13120 Standards demand the distance from the floor to the bottom of the pull cord(s) shall be at least 1500mm [59 1/16"] and a cord collection device (cleat) is fitted at or above this height. We can only supply blinds meeting these conditions unless the above disclaimer is completed and signed.

Additional requirements.




# SKYSOL2 Shape 07 - Rectangle with corner cut out


## Order Form and Product Guide

### Manual Fixing Configurations


#### Recess Fix




**2 BAR RECESS FIXED**  
BLIND Type:  
AO



**2 BAR FOOTPLATE RECESS FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB

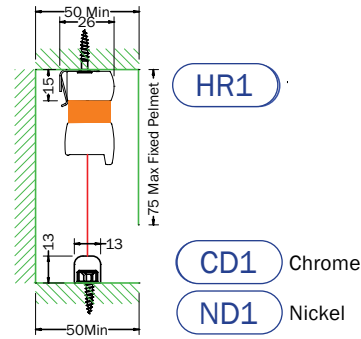


**2 BAR DOME RECESS FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB




**3 BAR RECESS FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB


#### Face Fix




**2 BAR FACE FIXED**  
BLIND Type:  
AO



**2 BAR FOOTPLATE FACE FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB



**2 BAR DOME FACE FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB




**3 BAR FACE FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB

# SKYSOL2 Shape 07 - Rectangle with corner cut out


## Order Form and Product Guide

### Powered Fixing Configurations


#### Recess Fix




**2 BAR RECESS FIXED**  
BLIND Type:  
A0



**2 BAR FOOTPLATE RECESS FIXED**  
BLIND Types:  
A0-DB, A0-DBE

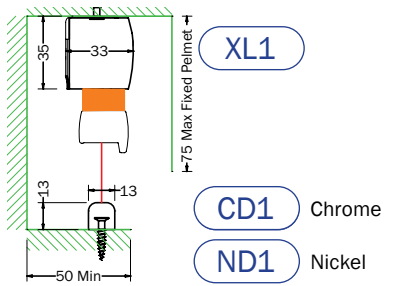


**2 BAR DOME RECESS FIXED**  
BLIND Types:  
A0-DB, A0-DBE




**3 BAR RECESS FIXED**  
BLIND Types:  
A0-DB, A0-DBE,  
AB, DB, DBE, PB


#### Face Fix




**2 BAR FACE FIXED**  
BLIND Type:  
A0



**2 BAR FOOTPLATE FACE FIXED**  
BLIND Types:  
A0-DB, A0-DBE

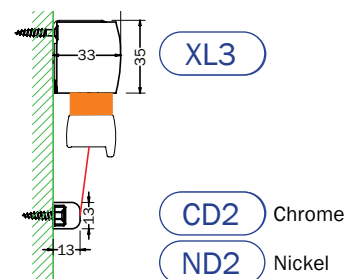

**2 BAR DOME FACE FIXED**  
BLIND Types:  
A0-DB, A0-DBE



**3 Bar FACE FIXED**  
BLIND Types:  
A0-DB, A0-DBE,  
AB, DB, DBE, PB