

Customer \_\_\_\_\_  
 Address \_\_\_\_\_

Tel \_\_\_\_\_  
 Mobile \_\_\_\_\_  
 Email \_\_\_\_\_

Order \_\_\_\_\_  
 Quote \_\_\_\_\_  
 Date \_\_\_\_\_  
 Project Name \_\_\_\_\_  
 Project Location \_\_\_\_\_

Are any of the “AO” type blinds (ie with pull cord) on this order to be installed where children under 42 months old are likely to be allowed? <sup>3</sup> **Yes No**

Blind No.	Window Location	Fabric <sup>1</sup>	Blind or Recess	Dimensions <sup>2</sup> See table below	Bar	Fixing position / reference <sup>4</sup>		Manual options				Powered options			Qty
						Top of Blind	Bottom of Blind	Angle From Vertical	Cord lock position <sup>5</sup> (Upper fabric)	Handle type	3 Bar Cord Quick Tensioners <sup>6</sup>	Controlled By	Motor wire exit point	Top or bottom Stack	
		Upper	Blind Recess	Width (X)	2 bar 3 bar	Face Fix Manual HR3 Powered XL3	FR2C FP3 CD2 ND2	AO (0°)	LHS    RHS	AO, AO-DB and AO-DBE do not have a handle	AO Blinds 2 Bar Only	Switch constant Switch Momentary Remote <sup>9</sup>	Left Right Centre Motor ID	AO, AO-DB & AO-DBE Top stack only	
		Lower		Drop (Y)	Hardware Colour			AB (0°-30°) DB (30°-60°) DBE (20°-45°) PB (60°-120°)	Metal Cord Cleat <i>(With black or white rubber insert)</i> Chrome - Black    White Nickel - Black    White						None Plastic Articulating <sup>5</sup> Plastic Fixed <sup>5</sup> Metal Chrome Metal Nickel
			Installation height <sup>3</sup>	Beige White Graphite		Recess Fix Manual HR1 Powered XL1	FR1 FP1 CD1 ND2								
			Incline angle (from Vertical)												


- Please see available fabrics in the online fabric collection here.
- Blind size max & mins, see table (min recess size = blind size + 10mm).
- Installation height required for cord operated blinds. EN13120 Standards demand the distance from the floor to the bottom of the pull cord(s) shall be at least 1500mm [59 1/16"] and a cord collection device (cleat) is fitted at or above this height. we can only supply blinds meeting these conditions unless the above question has been answered No.
- See default fitting kits on page 2 and 3.
- Colour matched to Hardware Colour.
- Quick tensioners are fitted to the guide wires on all 3 bar blinds.
- Quick tensioners are optional on cords (for easier tensioning) but there might be some instances where they cannot be fitted e.g. powered blinds & AO type blinds.
- The cord locks for the day and night fabrics will always be placed at opposite ends.
- Please fill in a Powered Accessories Custom Order Form.

Max & Mins	AO, AO/DB, AO/DBE		AB, DB, DBE, PB
Min X	Manual	206mm [8 1/8"]	
	Powered	Motors same end	1254mm [49 3/8"]
		Top & Bottom motor	N/A
Max X	Manual	2606mm	
	Powered	3000mm [118 1/8"]	
Min Y	Manual	100mm [3 15/16"]	
	Powered	Motors same end	101mm [4"]
		Top Bottom Motors	N/A
Max Y	Manual	2800mm [110 1/4"]	
	Powered	2500mm [98 7/16"]	


Motor ID	Description	Voltage
25SD1	Atlantic 12S Double End	12 V DC
25SD2	Atlantic 24S Double End	24 V DC
24	Somfy LW25-B83	24 V DC
LV25	Somfy LV25-B64	24 V DC
TM24	Hunter Douglas M35S	24 V DC

## Manual Fixing Configurations


### Recess Fix

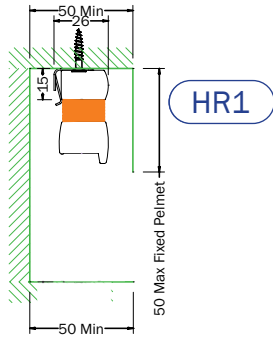


**2 BAR RECESS FIXED**  
BLIND Type:  
AO



**2 BAR FOOTPLATE RECESS FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB

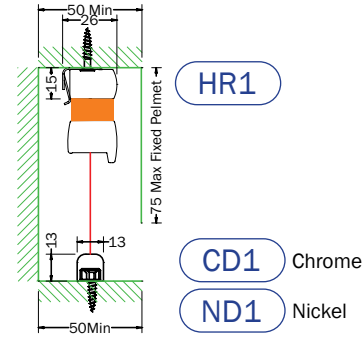


**2 BAR DOME RECESS FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB




**3 BAR RECESS FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB


### Face Fix




**2 BAR FACE FIXED**  
BLIND Type:  
AO



**2 BAR FOOTPLATE FACE FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB




**2 BAR DOME FACE FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB




**3 BAR FACE FIXED**  
BLIND Types:  
AO-DB, AO-DBE,  
AB, DB, DBE, PB

## Powered Fixing Configurations

### Recess Fix




**XL1**



**XL1**


**FP1**

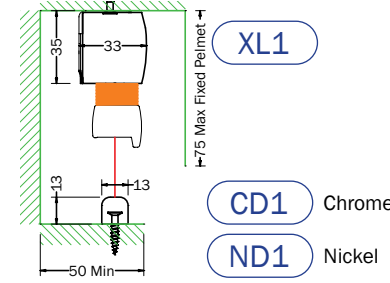

**XL1**

**CD1** Chrome

**ND1** Nickel



**XL1**

**FR1**


**2 BAR RECESS FIXED  
BLIND Type:  
A0**

**2 BAR FOOTPLATE  
RECESS FIXED  
BLIND Types:  
A0-DB, A0-DBE**


**2 BAR DOME RECESS FIXED  
BLIND Types:  
A0-DB, A0-DBE**

**3 BAR RECESS FIXED  
BLIND Types:  
A0-DB, A0-DBE,  
AB, DB, DBE, PB**

### Face Fix




**XL3**

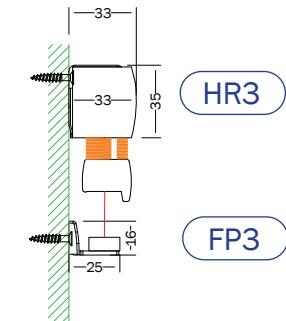

**HR3**


**FP3**

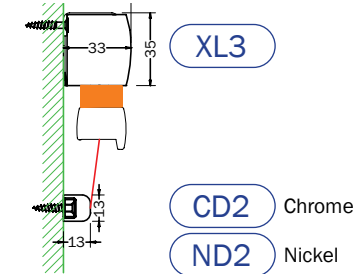

**XL3**

**CD2** Chrome

**ND2** Nickel



**XL3**

**FR2C**

**2 BAR FACE FIXED  
BLIND Type:  
A0**

**2 BAR FOOTPLATE FACE FIXED  
BLIND Types:  
A0-DB, A0-DBE**

**2 BAR DOME FACE FIXED  
BLIND Types:  
A0-DB, A0-DBE**

**3 Bar FACE FIXED  
BLIND Types:  
A0-DB, A0-DBE,  
AB, DB, DBE, PB**