


Customer \_\_\_\_\_  
 Address \_\_\_\_\_  
 \_\_\_\_\_

Tel \_\_\_\_\_  
 Mobile \_\_\_\_\_  
 Email \_\_\_\_\_

Order \_\_\_\_\_ Quote \_\_\_\_\_ Date \_\_\_\_\_  
 Project Name \_\_\_\_\_  
 Project Location \_\_\_\_\_

| 1         | 2               | 3                         | 4  | 5  | 6  | 7   |          | 8                          | 9            | 11  | 12                              | 13  | 14  | 15 |  |     |
|-----------|-----------------|---------------------------|--|--|--|---|----------|----------------------------|--------------|---|---------------------------------|---|---|----|--|-----|
| Blind No. | Window Location | Blind or Recess           | Frame Details  | Blind Type <sup>2</sup>  | Incline<br> | Overall Frame Dimensions<br>See table below |          | Hardware Colour            | First Fabric | Blind Format  | Second Fabric                   | Manual Handle Options   | Powered options <sup>5,6</sup>  |    |  | Qty |
|           |                 |                           |  |  |  | Width (X)                                   | Drop (Y) |                            |              |   |                                 |   |   |    |  |     |
|           |                 | Blind Recess <sup>1</sup> | Orientation<br>Standard<br><br>Colour<br>Beige<br>White<br>Black | AO (0°)<br><i>Powered only</i><br>AB (0°-30°)<br>DB (31°-60°)<br>PB (61°-120°) |  |   |          | Beige<br>White<br>Graphite |              | Single ended Full Travel<br><br>Single ended Full Travel <sup>3</sup><br><b>Both fabrics stack same end</b><br><br>Double ended Full Travel<br><b>Fabrics stack at each end</b> | N/A<br><br>Fabric code<br>_____ | None<br>Plastic Articulating <sup>4</sup><br>Plastic Fixed <sup>4</sup><br>Metal Chrome<br>Metal Nickel<br>Clear (Control Rod)<br><br>Rod Length _____<br>Qty _____ | <b>Motor Wire exit point</b><br>Left Right Centre<br><br><b>Controlled By</b><br>Switch constant<br>Switch Momentary<br>Remote <sup>5</sup><br><br>Motor ID _____ |    |  |     |

- When Recessed dimension is given, 4mm is deducted from the width and drop to allow for clearance in the recess.
- AO Blind type can only be powered when in a frame, all other blind types can be manual or powered.
- This is the Day/Night option, i.e. both fabrics stack at the same end.
- Colour matched to the hardware.
- Please fill in a Powered Accessories order form.
- For blinds with two fabrics you will receive a Day/Night Controller.

Larger widths can be accommodated depending on fabric and drop, visible support cords can be added and additional fixings on frames 1m wide may be required.



### Maximums & minimums With Guide Wires

|                | Width (X) |            | Drop (Y) |            |
|----------------|-----------|------------|----------|------------|
|                | Min       | Max        | Min      | Max        |
| <b>Manual</b>  | 1400mm    | 2500mm     | 200mm    | 2500mm     |
| <b>Powered</b> | [55 1/8"] | [98 7/16"] | [7 7/8"] | [98 7/16"] |

### Without Guide Wires

|                | Width (X)              |                        | Max                  | Drop (Y)          |                      |
|----------------|------------------------|------------------------|----------------------|-------------------|----------------------|
|                | Min                    |                        |                      | Min               | Max                  |
| <b>Manual</b>  | Single or Double ended | Day Night <sup>3</sup> | 2500mm<br>[98 7/16"] | 200mm<br>[7 7/8"] | 2500mm<br>[98 7/16"] |
|                | 128mm<br>5 1/16"]      | 128mm<br>5 1/16"]      |                      |                   |                      |
| <b>Powered</b> | 478mm<br>[18 13/16"]   | 628mm<br>[24 3/4"]     |                      |                   |                      |

| Motor ID | Description             | Voltage |
|----------|-------------------------|---------|
| 25SD1    | Atlantic 12S Double End | 12 V DC |
| 25SD2    | Atlantic 24S Double End | 24 V DC |
| 24       | Somfy LW25-B83          | 24 V DC |
| LV25     | Somfy LV25-B64          | 24 V DC |
| TM24     | Hunter Douglas M35S     | 24 V DC |

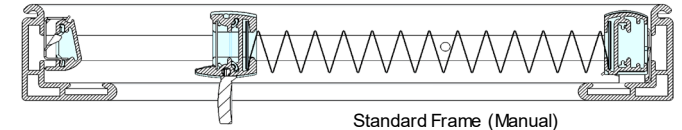

Notes

Standard frame powered  
**AO types only** (see note 2)  
 vertical mounting only.

