

HYGIENE & SANITATION

DOMETIC HTS SERIES HOLDING TANKS

Experience Dometic's HTS Series holding tank systems for marine applications. It's corrosion-proof, leak-proof, odor free and built with thick-walled polyethylene for long-lasting durability. Top-mounted fittings and diptube discharge plumbing prevent leaks. Multiple discharge outlets eliminate the need for complex plumbing. Numerous designs offer boat builders flexibility when planning vessel layouts.

ODOR-FREE

FULLY SEALED AND FACTORY-TESTED

EASY TO INSTALL

PRE-PLUMBED AND READY TO GO

TWO SEPARATE OUTLETS


NO EXTRA PLUMBING REQUIRED



Mobile living made easy.


 **DOMETIC**

EVERYTHING YOU NEED IN A BASIC TANK

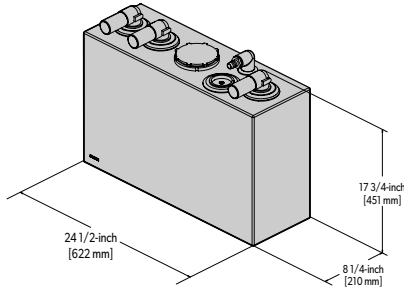


12 HTS-VRT
HEIGHT: 17.75 IN./451 MM
WIDTH: 8.25 IN./210 MM
LENGTH: 24.5 IN./622 MM

ITEM: 322840122

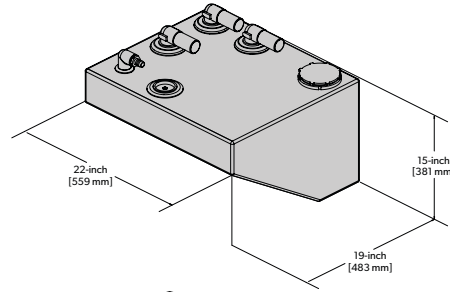


15 HTS-HRZ
HEIGHT: 15 IN./381 MM
WIDTH: 19 IN./483 MM
LENGTH: 22 IN./559 MM

ITEM: 322840151

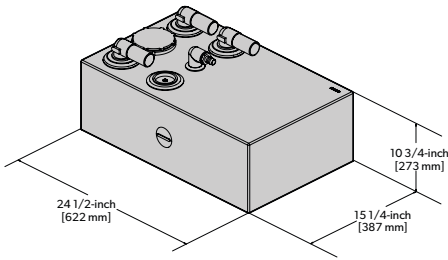


12 HTS-HRZ
HEIGHT: 10.75 IN./273 MM
WIDTH: 15.25 IN./387 MM
LENGTH: 24.5 IN./622 MM

ITEM: 322840121

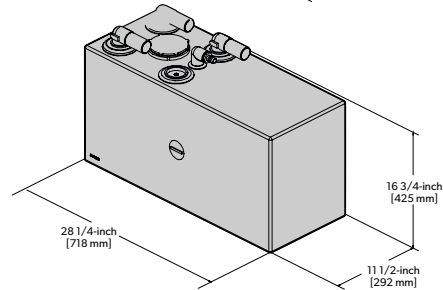


20 HTS-VRT
HEIGHT: 16.75 IN./425 MM
WIDTH: 11.5 IN./292 MM
LENGTH: 28.28 IN./718 MM

ITEM: 322840202

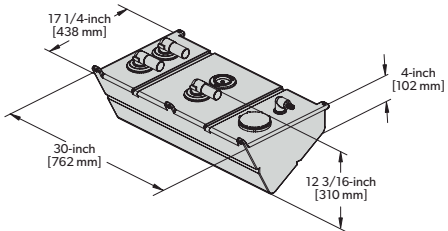


12 HTS-HL
HEIGHT: 12.25 IN./311 MM
WIDTH: 17.25 IN./438 MM
LENGTH: 30 IN./762 MM

ITEM: 322800121

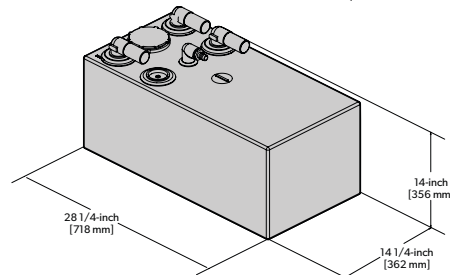


20 HTS-HRZ
HEIGHT: 14 IN./356 MM
WIDTH: 14.25 IN./362 MM
LENGTH: 28.25 IN./718 MM

ITEM: 322840201

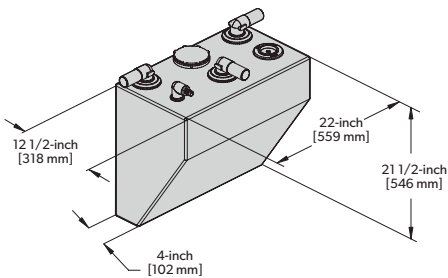

15 HTS-VRT
HEIGHT: 21.5 IN./546 MM
WIDTH: 12.5 IN./318 MM
LENGTH: 22 IN./559 MM

ITEM: 322840152

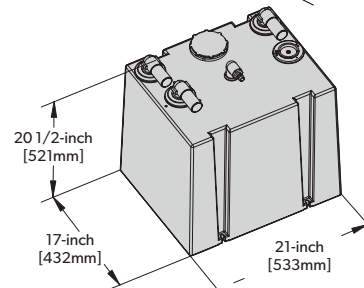


25 HTS-HRZ
HEIGHT: 20.5 IN./521 MM
WIDTH: 17 IN./432 MM
LENGTH: 21 IN./533 MM

ITEM: 322800251


Model	12 HTS-VRT	12 HTS-HL	12 HTS-HL	15 HTS-VRT	15 HRT-HRZ	20 HTS-VRT	20 HTS-HRZ	25 HTS-HRZ
Capacity (gal./liters)	11/42	11/42	12/45	15/57	15/57	18/68	18/68	25/94
Empty Weight (lbs./kg)	20/9.1	20/9.1	22/10	25/11.3	25/11.3	27/12.2	171/77.6	231.105
Max. Weight (lbs./kg)	108/49	108/49	118/53.5	145/65.8	145/65.8	171/77.6	171/77.6	231/105
Inlet Plumbing								
ID	1.5 in./38 mm sanitation hose or PVC pipe							
Discharge Plumbing								
ID	1.5 in./38 mm sanitation hose or PVC pipe							
Vent Hose								
ID	5/8 in./16 mm sanitation hose							

EVERYTHING YOU NEED IN A BASIC TANK

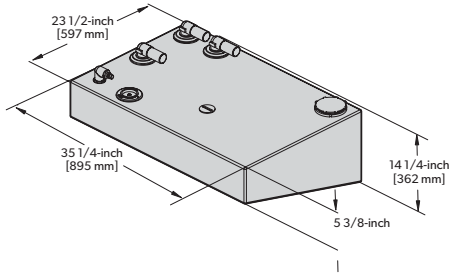


28 HTS-HL
HEIGHT: 14.25 IN./362 MM
WIDTH: 23.5 IN./597 MM
LENGTH: 35.25 IN./895 MM

ITEM: 322800281




50 HTS-VRT-HL
HEIGHT: 33.25 IN./845 MM
WIDTH: 19 IN./483 MM
LENGTH: 22 IN./559 MM

ITEM: 322850501

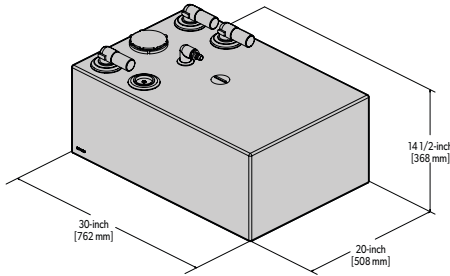


30 HTS-HRZ
HEIGHT: 14.5 IN./368 MM
WIDTH: 20 IN./508 MM
LENGTH: 30 IN./762 MM

ITEM: 322840301

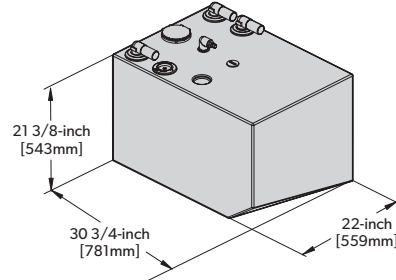


50 HTS-HRZ-HL
HEIGHT: 21.375 IN./543 MM
WIDTH: 22 IN./559 MM
LENGTH: 30.75 IN./781 MM

ITEM: 322850502

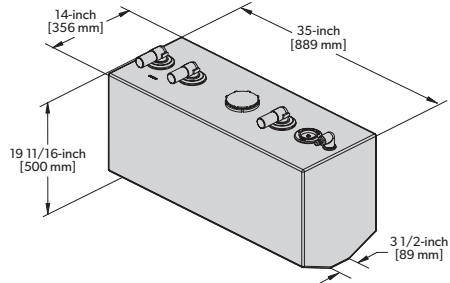


35 HTS-HL
HEIGHT: 19.75 IN./502 MM
WIDTH: 14 IN./356 MM
LENGTH: 35 IN./889 MM

ITEM: 322800351

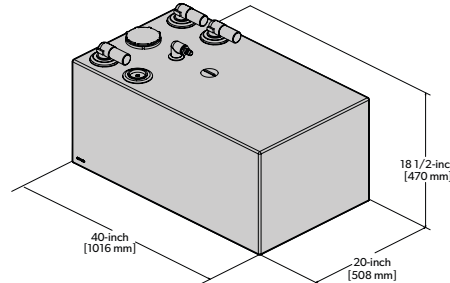


55 HTS-HRZ
HEIGHT: 18.5 IN./470 MM
WIDTH: 20 IN./508 MM
LENGTH: 40 IN./1016 MM

ITEM: 322840551

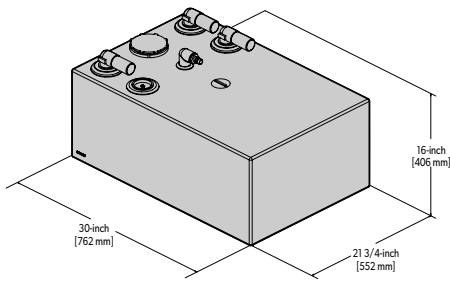

40 HTS-HRZ
HEIGHT: 16 IN./406 MM
WIDTH: 21.75 IN./552 MM
LENGTH: 30 IN./762 MM

ITEM: 322840401

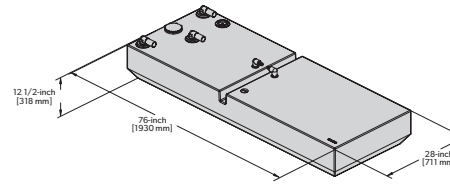


80 HTS-HRZ
HEIGHT: 12.5 IN./318 MM
WIDTH: 28 IN./711 MM
LENGTH: 76 IN./1930 MM

ITEM: 322800801


Model	28 HTS-HL	30 HTS-HRZ	35 HTS-HL	40 HTS-HRZ	50 HTS-VRT-HL	50 HTS-HRZ-HL	55 HTS-HRZ	80 HTS-HRZ
Capacity (gal./liters)	28/106	28/106	35/132	34/129	50/189	50/189	55/208	80/302
Empty Weight (lbs./kg)	37/16.8	37/16.8	38/17.2	41/18.6	53/24	53/24	53/24	54/24.5
Max. Weight (lbs./kg)	261/118	261/118	318/144	313/142	453/205	453/205	493/224	694/315
Inlet Plumbing								
ID	1.5 in./38 mm sanitation hose or PVC pipe							
Discharge Plumbing								
ID	1.5 in./38 mm sanitation hose or PVC pipe							
Vent Hose								
ID	5/8 in./16 mm sanitation hose							

ODOR-FREE HOLDING TANK SYSTEMS

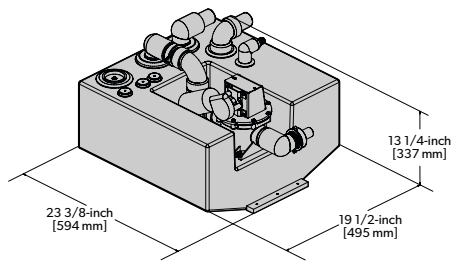


10 HTS-T
HEIGHT: 13.25 IN./635 MM
WIDTH: 19.5 IN./495 MM
LENGTH: 23.375 IN./594 MM

ITEM: 322721012 – 12V
ITEM: 322721024 – 24V

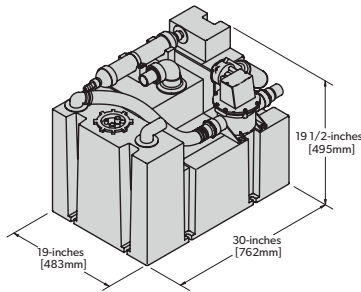

28 HTS-T
HEIGHT: 19.5 IN./495 MM
WIDTH: 19 IN./483 MM
LENGTH: 30 IN./762 MM

ITEM: 322012812 – 12V
ITEM: 322012824 – 24V

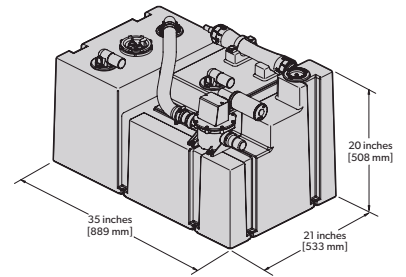

40 HTS-T
HEIGHT: 20 IN./508 MM
WIDTH: 21 IN./533 MM
LENGTH: 35 IN./889 MM

ITEM: 322014012 – 12V
ITEM: 322014024 – 24V

Model	10 HTS-T	28 HTS-T	40 HTS-T
Capacity (gal./liters)	10/38	28/106	40/151
Weight			
Empty (lbs./kg)	18/8.2	40/18	44/20
Max (lbs./kg)	98/40.9	260/118	364/165
Outlets (qty)	2	2	2
Vent Filter	-	Included	
HTS-T SERIES SYSTEM REQUIREMENTS			
Electrical			
Discharge pump* Power draw (avg.)	6 amps/12 V DC 3 amps/24 V DC		
Discharge pump* Circuit breaker/fuse	10 amps/12 V DC 5 amps/24 V DC		
DTM04 Tank Monitor Power draw (avg.)	0.15 amp/12 V DC 0.09 amp/24 V DC		
DTM04 Tank Monitor Circuit breaker/fuse	1 amp/12 V DC 1 amp/24 V DC		
Inlet Plumbing			
ID	1.5 in./38 mm sanitation hose or PVC pipe		
Discharge Plumbing			
ID	1.5 in./38 mm sanitation hose or PVC pipe		
Horizontal Run	30 ft./9.1 m max. to discharge fitting		
Vertical Run	6 ft./1.8 m max. to discharge fitting		
Vent Hose			
ID	5/8 in./16 mm sanitation hose		