

PRODUCT INFO

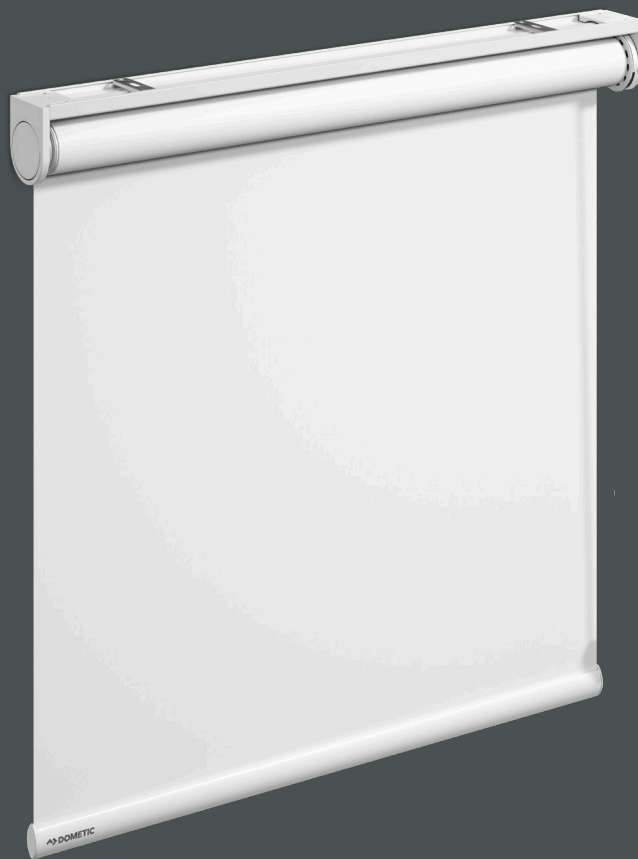
DOMETIC OCEANAIR ROLLERBLIND RANGE

Featuring durable powder coated or anodised hardware, the discrete design of the Dometic Oceanair Rollerblind provides natural light control, whilst also adding a elegant, contemporary look to your yacht.

MANUAL OR POWERED
CONTROL OPTIONS

STYLISH
DESIGN

DURABLE HARDWARE
HIGH QUALITY



Mobile living made easy.

 **DOMETIC** **OUTDOOR**

COMPACT, DISCREET, AND PRACTICAL DESIGN



From fixings to restraints, Dometic Oceanair Rollerblinds can be customized through a variety of different options. This flexibility allows you to choose your desired finish, with a wide range of stylish fabrics. From complete blackout to softer, light filtering sheer fabric to create the ideal ambience with the freedom of choice and a high quality finish.

BENEFITS WITH ROLLERBLINDS

- Custom manufactured to client specification
- Broad range of sheer, dimout, and blackout blinds
- Optional side tracks and guide wires hold the blind in place, ideal for angled apertures or if used in any moving vehicle
- Powered and manual options available, complemented by a range of control mechanisms and accessories
- Mounted profile and cassette options for easy installation
- Various hem bar styles available

SPECIFICATIONS


POWERED CONTROLS	Volt: 12vDC / 24vDC / 230vAC Radio Remote Compatible with various automation systems
MANUAL CONTROLS	Chain PrecisionRise
FABRIC	Blackout Sheer Dimout
HARDWARE	Silver White Black Custom
FIXINGS	Brackets (*not available on PrecisionRise) Mounting profile Cassette
RESTRAINTS	Free hanging Guide wire Side tracks (*not available on PrecisionRise)

ROLLER BLIND TECHNICAL DATA PRODUCT CODE: RO2	BRACKET OPTIONS			MOUNTING PROFILE		CASSETTE OPTIONS		
	BR 38	BR 46	BR 55	BR 38	BR 46	C1	C2	C3
Product Depth A Free Hanging	53mm (2.0")	2500mm (98")	93mm (3.7")	61mm (2.4")		75mm (3.0")	89mm (3.5")	103mm (4.1")
Product Depth A Guide Wire	71mm (2.8")	3000mm (118")						
Product Height B	67mm (2.6")	76mm (3.0")	101mm (4.0")	65mm (2.6")	74mm (2.9")	69mm (2.7")	80mm (3.1")	100mm (3.9")
MANUAL OPERATION								
Chain	Min X: 200mm (7.9") Max X: 2499mm (98.4")	Min X: 2500mm (98.4") Max X: 2999mm (118.1") Max Y: 3000mm (118.1")	X	Min X: 200mm (7.9") Max X: 2499mm (98.4")	Min X: 2500mm (98.4") Max X: 2999mm (118.1")	Min X: 200mm (7.9") Max X: 1999mm (78.7")	Min X: 2000mm (78.7") Max X: 2499mm (98.4")	X
	Tube: Ø37 (1.5")	Tube: Ø50 (2.0")		Tube: Ø37 (1.5")	Tube: Ø50 (2.0")	Tube: Ø37 (1.5")	Tube: Ø50 (2.0")	X
Max Stow Diameter Chain	65mm (2.6")	80mm (3.1")		65mm (2.6")	80mm (3.1")	55mm (2.1")	65mm (2.6")	70mm (2.8")
PrecisionRise				Tube: Ø28 (1.1") Min width: 430 < 459mm Max drop = 1200 Min width: 460 < 479mm Max drop = 1400 Min width: 480 < 499mm Max drop = 1700 Min width: 500 < 759mm Max drop = 2000 Tube: Ø38 (1.6") Min width: 760 < 2800mm Max drop = 2400	X	Min X: 430mm (18.1") Max X: 2800mm (110.2")	Min X: 430mm (18.1") Max X: 2800mm (110.2")	Min X: 430mm (18.1") Max X: 2800mm (110.2")
Max Stow Diameter PrecisionRise	X	X	X			Max Y: 2400mm (94.5") Tube: Ø28-38 (1.1-1.5")		X
						N/A	N/A	N/A
POWERED								
Atlantic 12vDC	Min X: 470mm (18.5") Max X: 2500mm (98.4")	Min X: 470mm (18.5") Max X: 3000mm (118.1")	X	Min X: 470mm (18.5") Max X: 2500mm (98.4")	Min X: 470mm (18.5") Max X: 3000mm (118.1")	Min X: 470mm (18.5") Max X: 1900mm (74.8")	Min X: 2000mm (78.7") Max X: 2499mm (98.4")	Min X: 2500mm (98.4") Max X: 2999mm (118.1")
	Max Y: 3000mm (118.1")			Max Y: 3000mm (118.1")		Max Y: 2500mm (98.4")	Max Y: 2500mm (98.4")	
Atlantic 24vDC	Min X: 470mm (18.5") Max X: 2500mm (98.4")	Min X: 470 (18.5") Max X: 3000mm (118.1")	X	Min X: 470mm (18.5") Max X: 2500mm (98.4")	Min X: 470mm (18.5") Max X: 3000mm (118.1")	Min X: 470mm (18.5") Max X: 1900mm (74.8")	Min X: 2000mm (78.7") Max X: 2499mm (98.4")	Min X: 2500mm (98.4") Max X: 2999mm (118.1")
	Max Y: 3000mm (118.1")			Max Y: 3000mm (118.1")		Max Y: 2500mm (98.4")	Max Y: 2500mm (98.4")	
Pacific 230vDC	X	Min X: 570mm (22.4") Max X: 3000mm (118.1")	Min X: 640mm (25.1") Max X: 3500mm (137.8")	X	Min X: 570mm (22.4") Max X: 3000mm (118.1")	X	X	Min X: 570mm (22.4") Max X: 3000mm (118.1")
		Max Y: 3000mm (118.1")	Max Y: 3500mm (137.8")		Max Y: 3000mm (118.1")			Max Y: 3500mm (137.8")
		Tube: Ø50 (2.0")	Tube: Ø62 (2.4")		Tube: Ø50 (2.0")			Tube: Ø50 (2.0")

BENEFITS WITH MANUAL ROLLERBLINDS

- ## SPECIFICATIONS

MANUAL CONTROLS	Chain
FABRIC	Blackout Sheer Dimout
HARDWARE	Silver White Black Custom
FIXINGS	Brackets Mounting profile Cassette
RESTRAINTS	Free hanging Guide wire Side tracks



MANUAL OPERATION										
Chain	Min X: 200mm (7.9") Max X: 2499mm (98.4")	Min X: 2500mm (98.4") Max X: 2999mm (118.1")	X	Min X: 200mm (7.9") Max X: 2499mm (98.4")	Min X: 2500mm (98.4") Max X: 2999mm (118.1")	Min X: 200mm (7.9") Max X: 1999mm (78.7")	Min X: 2000mm (78.7") Max X: 2499mm (98.4")	X		
		Max Y: 3000mm (118.1")		Max Y: 3000mm (118.1")		Max Y: 2500mm (98.4")		Max Y: 3000mm (118.1")		
	Tube: Ø37 (1.5")	Tube: Ø50 (2.0")		Tube: Ø37 (1.5")		Tube: Ø50 (2.0")		Tube: Ø50 (2.0")		
Max Stow Diameter Chain	65mm (2.6")	80mm (3.1")		65mm (2.6")	80mm (3.1")	55mm (2.1")	65mm (2.6")	70mm (2.8")		
PrecisionRise				Tube: Ø28 (1.1") Min width: 430 < 459mm Max drop = 1200	X	Min X: 430mm (18.1") Max X: 2800mm (110.2")	Min X: 430mm (18.1") Max X: 2800mm (110.2")	Min X: 430mm (18.1") Max X: 2800mm (110.2")		
				Min width: 460 < 479mm Max drop = 1400		Max Y: 2400mm (94.5")				
	X	X	X	Min width: 480 < 499mm Max drop = 1700			Tube: Ø28-38 (1.1-1.5")			
Max Stow Diameter PrecisionRise				Min width: 500 < 759mm Max drop = 2000			N/A	N/A	N/A	
				Tube: Ø38 (1.6") Min width: 760 < 2800mm Max drop = 2400						



POWERED ROLLERBLINDS




Powered rollerblinds offer users easy shade and privacy for true on-board comfort. This is made easier than ever with a choice of powered controls at your disposal to select from. The use of powered control, removes the need for cords, leaving the aperture completely clear and hassle free.









BENEFITS WITH POWERED ROLLERBLINDS

- Hand held remote, wall switch or integration into the control system
- Convenient powered operation
- Effortlessly control your environment
- Suitable for hard to reach areas
- Range of stylish fittings available
- Durable aluminium hardware
- Guide wire or side tracks available for securely held taught blinds
- Classic roller blind look

SPECIFICATIONS

POWERED CONTROLS	Volt: 12vDC / 24vDC / 230vAC Radio Remote Compatible with various automation systems
FABRIC	Blackout Sheer Dimout
HARDWARE	Silver White Black Custom
FIXINGS	Brackets Mounting profile Cassette
RESTRAINTS	Free hanging Guide wire Side tracks



ROLLER BLIND TECHNICAL DATA	BRACKET OPTIONS			MOUNTING PROFILE		CASSETTE OPTIONS			
	 BR 38	 BR 46	 BR 55	 BR 38	 BR 46	 C1	 C2	 C3	
PRODUCT CODE: RO2									
Product Depth A Free Hanging	53mm (2.0")	2500mm (98")	93mm (3.7")	61mm (2.4")		75mm (3.0")	89mm (3.5")	103mm (4.1")	
Product Depth A Guide Wire	71mm (2.8")	3000mm (118")							
Product Height B	67mm (2.6")	76mm (3.0")	101mm (4.0")	65mm (2.6")	74mm (2.9")	69mm (2.7")	80mm (3.1")	100mm (3.9")	
POWERED									
Atlantic 12vDC	Min X: 470mm (18.5") Max X: 2500mm (98.4") Max Y: 3000mm (118.1")	Min X: 470mm (18.5") Max X: 3000mm (118.1")	X	Min X: 470mm (18.5") Max X: 2500mm (98.4") Max Y: 3000mm (118.1")	Min X: 470mm (18.5") Max X: 3000mm (118.1")	Min X: 470mm (18.5") Max X: 1900mm (74.8") Max Y: 2500mm (98.4")	Min X: 2000mm (78.7") Max X: 2499mm (98.4") Max Y: 2500mm (98.4")	Min X: 2500mm (98.4") Max X: 2999mm (118.1") Max Y: 2500mm (98.4")	X
	Tube: Ø37 (1.5")	Tube: Ø50 (2.0")		Tube: Ø37 (1.5")	Tube: Ø50 (2.0")	Tube Ø: 37mm (1.5")	Tube Ø: 37mm (1.5")	Tube Ø: 50mm (2.0")	
	Atlantic 24vDC	Min X: 470mm (18.5") Max X: 2500mm (98.4") Max Y: 3000mm (118.1")		Min X: 470 (18.5") Max X: 3000mm (118.1")	X	Min X: 470mm (18.5") Max X: 2500mm (98.4") Max Y: 3000mm (118.1")	Min X: 470mm (18.5") Max X: 3000mm (118.1")	Min X: 470mm (18.5") Max X: 1900mm (74.8") Max Y: 2500mm (98.4")	
Tube: Ø37 (1.5")		Tube: Ø50 (2.0")	Tube: Ø37 (1.5")	Tube: Ø50 (2.0")		Tube: Ø37 (1.5")	Tube: Ø37 (1.5")	Tube: Ø50 (2.0")	
Pacific 230vDC		X	Min X: 570mm (22.4") Max X: 3000mm (118.1") Max Y: 3000mm (118.1")	Min X: 640mm (25.1") Max X: 3500mm (137.8")		X	Min X: 570mm (22.4") Max X: 3000mm (118.1") Max Y: 3000mm (118.1")	X	X
	Tube Ø: 37mm (1.5")		Tube: Ø50 (2.0")	Tube: Ø62 (2.4")			Tube: Ø50 (2.0")		

Dimensions are intended as a guide only - Contact your nearest distributor for further details.

Precision Rise Rollerblinds




The PrecisionRise offers an all new, unique smart locking mechanism that allows it to be easily set and secured at any position. Enjoy unspoilt views or shade yourself from the sun, with this stylish and modern shading solution.









Benefits with Precision Rise Rollerblinds

- Custom manufactured to client specification
- Smart locking mechanism
- The mouting profile system creates a one-piece unit, offering simple installation with minimal tooling required
- Robust quaility, ideal for the harshest marine conditions
- Broad range of sheer, dimout, and blackout blinds
- Optional guide wires hold the blind in place, ideal for angled apertures or if used in any moving vehicle
- Various hem bar styles available

Specifications

Precision Controls	PrecisionRise locking mechanism
Fabric	Blackout Sheer Dimout
Hardware	Silver White Black Custom
Fixings	Mounting profile Cassette
Restraints	Free hanging Guide wire



ROLLER BLIND TECHNICAL DATA	BRACKET OPTIONS			MOUNTING PROFILE		CASSETTE OPTIONS			
									
	BR 38	BR 46	BR 55	BR 38	BR 46	C1	C2	C3	
Product Depth A Free Hanging	53mm (2.0")	2500mm (98")	93mm (3.7")	61mm (2.4")		75mm (3.0")	89mm (3.5")	103mm (4.1")	
Product Depth A Guide Wire	71mm (2.8")	3000mm (118")							
Product Height B	67mm (2.6")	76mm (3.0")	101mm (4.0")	65mm (2.6")	74mm (2.9")	69mm (2.7")	80mm (3.1")	100mm (3.9")	
PrecisionRise	X	X	X	X	Min X: 430mm (18.1") Max X: 2800mm (110.2")		Min X: 430mm (18.1") Max X: 2800mm (110.2")		X
Max Stow Diameter PrecisionRise					Max Y: 2400mm (94.5")				
					Tube: Ø28-38 (1.1-1.5")				
					N/A	N/A	N/A		

Dimensions are intended as a guide only - Contact your nearest distributor for further details.